

RICE LAKE[®]
WEIGHING SYSTEMS

TEEPOS




Ishida Uni-5 Series

Características estándar

- Large color touchscreen (7 in)
- Dual-range weighing (0 to 15 lb × 0.005lb/15 to 30 lb × 0.01 lb)
- Ethernet communications
- Up to 99 pages of preset keys
- Adjustable touchscreen viewing angle
- 77 tactile keys
- 4 MB memory
- Grayscale LCD customer-side display
- Self-serve mode/operation
- 30+ selectable fixed bar code formats
- 2020 nutrition labeling
- Configurable for different languages including Spanish, French and German
- Compatible with third-party communication software, including Upshop's InterScale and Invafresh's ePlum



RICE LAKE[®]
WEIGHING SYSTEMS

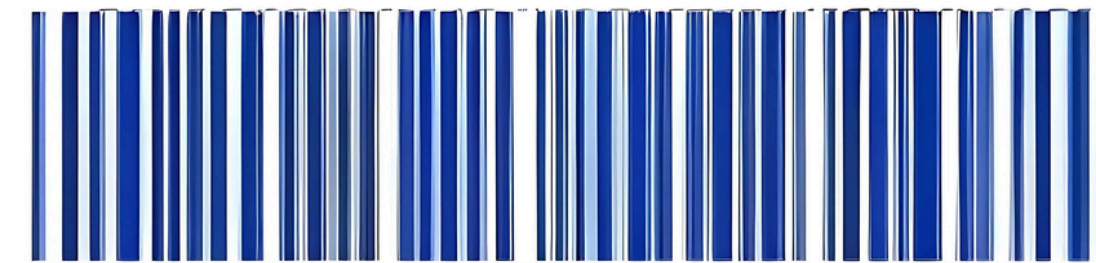


TEEPOS



Value By Design

- **Ishida's Uni-5 Series of price-computing scales and printers are positioned to be one of the best values in retail weighing today. Retail customers may choose from three distinct printer and scale-base configurations— all with the same easy-to-use universal control panel.**
 -
 - **Whether selecting the straightforward bench model, bench with pole, or elevated head style, Uni-5 users can appreciate a large, full-color touchscreen, while customers view advertised specials and details of their purchase on an ultra-bright customer-side LCD.**
 -
- The Uni-5 is more than just attractively priced. It's also attractive in design, with a polished, black polymer housing that's easy to clean, and a convenient sideloading printer for quick label changing. A low-profile design and green energy consumption round out a long list of essential features for today's progressive retail marketplace**

RICE LAKE[®]
WEIGHING SYSTEMS

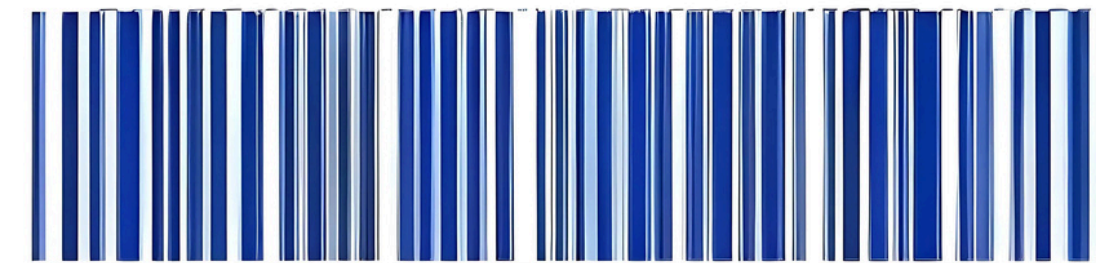

TEEPOS



Especificaciones del Ishida Uni-5

Capacity (Dual Range):

0 to 15 × 0.005 lb, 15 to 30 × 0.01 lb

Capacity (Single Range):

60 × 0.02 lb option

Display:

Operator: Color LCD, 7 in

Customer: Grayscale LCD, 7 in

Display Items:

Tare: Four-digits

Unit price: Six-digits

Weight: Five-digits

Total price: Six-digits

Preset Keys:

1980: 20 × 99 pages

Memory Capacity:

4 MB

Communications:

Static TCP/IP 10/100 Base T

Ethernet

Wireless WEP/WPA/WPA2

Interface:

USB port, back-up and restore only

Platter:

15.7 × 10.8 in (398 × 275 mm)

Print Head:

Direct thermal 2.2 in head (56 mm)

Print Speed:

3.2/ 3.9/ 4.7/ 5.9 in/sec

(80/ 100/ 120/ 150 mm/sec)

Label Size:

Width: 1.5 to 2.5 in (38 to 64 mm)

Length: 1.5 to 7.9 in (38 to 200 mm)

Label Roll:

Inside diameter: 1.6 in (40 mm) min

Outside diameter: 3.9 in (100 mm)

max

Label Backing Paper:

Width: Up to 2.6 in (66 mm)

Power Supply:

AC100 to 240 V, 50/60 Hz

Power Consumption:

Stand-by: 50 W

In operation: 120 W

Classification:

NTEP CC 07-099



UL listed

Warranty:

One-year limited



Ishida Uni-5 Dimensions

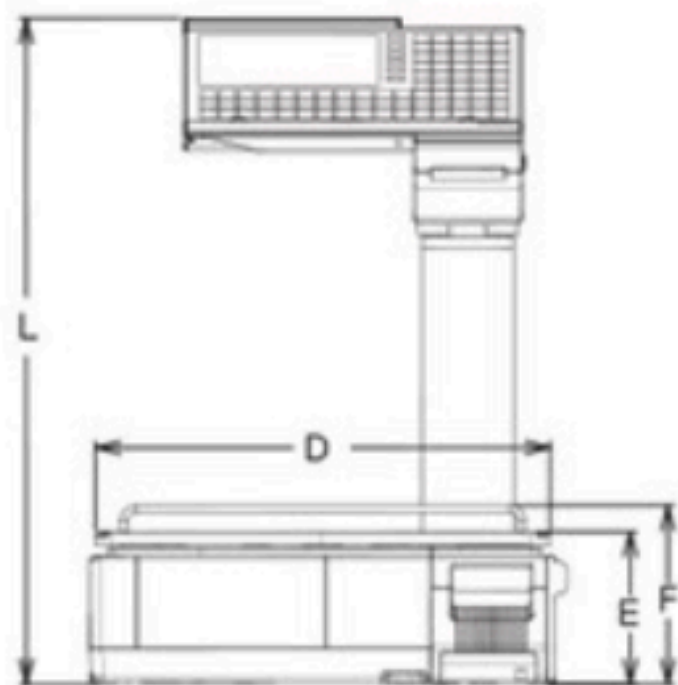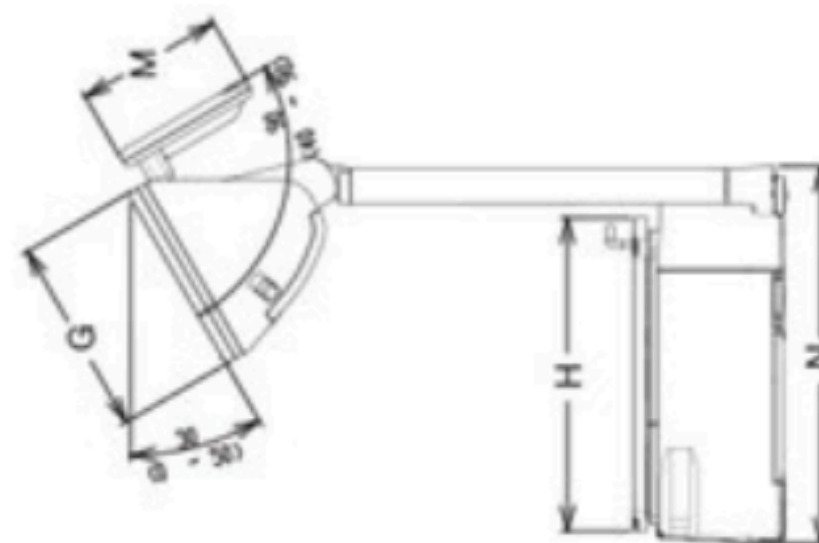


Dimensions

A	16.4 in (417 mm)	F	6.2 in (157 mm)	L	23.0 in (584 mm)
B	18.3 in (464 mm)	G	6.8 in (173 mm)	M	5.2 in (130 mm)
C	11.7 in (296 mm)	H	10.8 in (275 mm)	N	13.0 in (331 mm)
D	15.7 in (398 mm)	I	11.7 in (298 mm)	O	18.4 in (468 mm)
E	5.3 in (134 mm)	K	7.5 in (190 mm)	P	22.0 in (558 mm)

RICE LAKE®

WEIGHING SYSTEMS

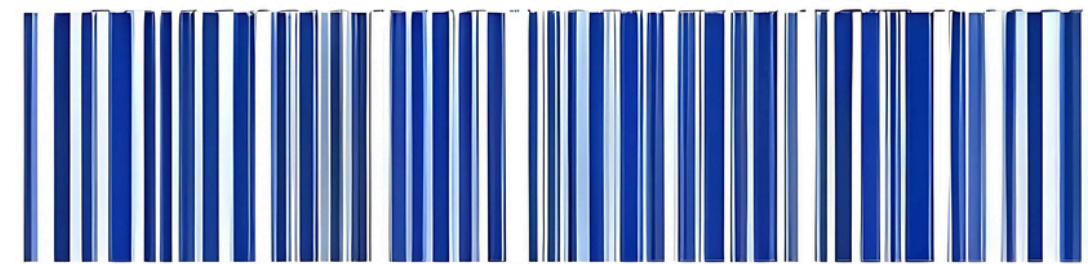

TEEPOS

